

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° : 60153573. **Customer pos. no.:**

Model :
NOVA UP 600 M-AE

Pump data

Free passage : 10 mm
Pressure rating :
Min. fluid temperature : 0 °C
Max. fluid temperature : 35 °C
Max. Ambient temperature : 40 °C

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure : 0,33938 psi



Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body : Technopolymer
Impeller : Technopolymer
O-Ring : NBR
Motor top body : Stainless Steel AISI 304
Rotor shaft : AISI 416 X12 CrS 13 UNI EN 10088-1
V-RING : NBR
Suction strainer : Technopolymer

Curve tolerance according to ISO 9906

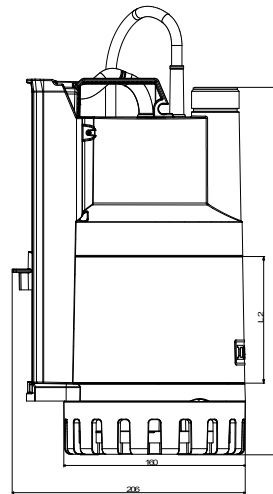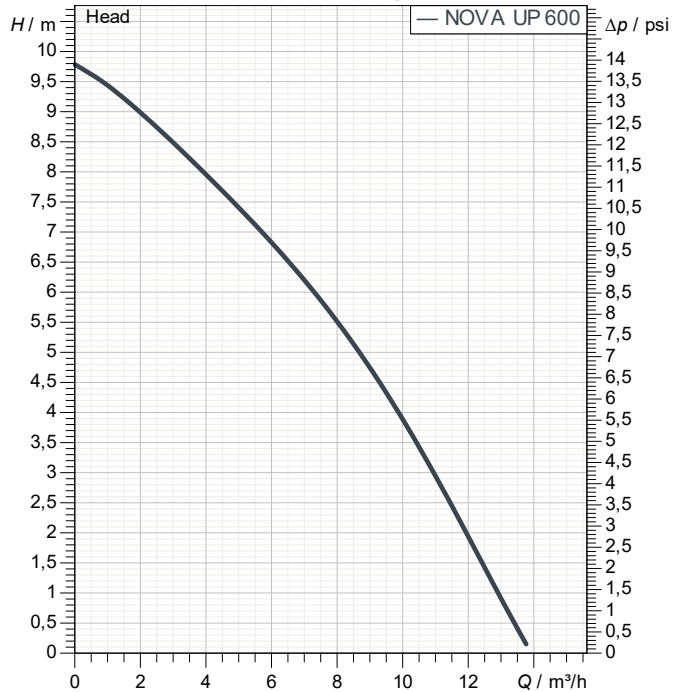

Motor data

Motor brand : DAB
Nominal power P2 : 0,52 kW
Rated speed : 2.850 1/min
Rated voltage : 1~ 220-240 V 50 Hz
Nominal current : 3,5 A
Degree of protection : IP 68

Weight : 7,3 kg

Dimensions in mm

L1	324				
L2	111,6				

Pump connection

Suction side : /
Discharge side : 1" 1/4 G / --



WATER • TECHNOLOGY

PERFORMANCE CURVES

2024-06-11

Page 2 / 3

DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

NOVA UP 600 M-AE

Curve tolerance according to ISO 9906

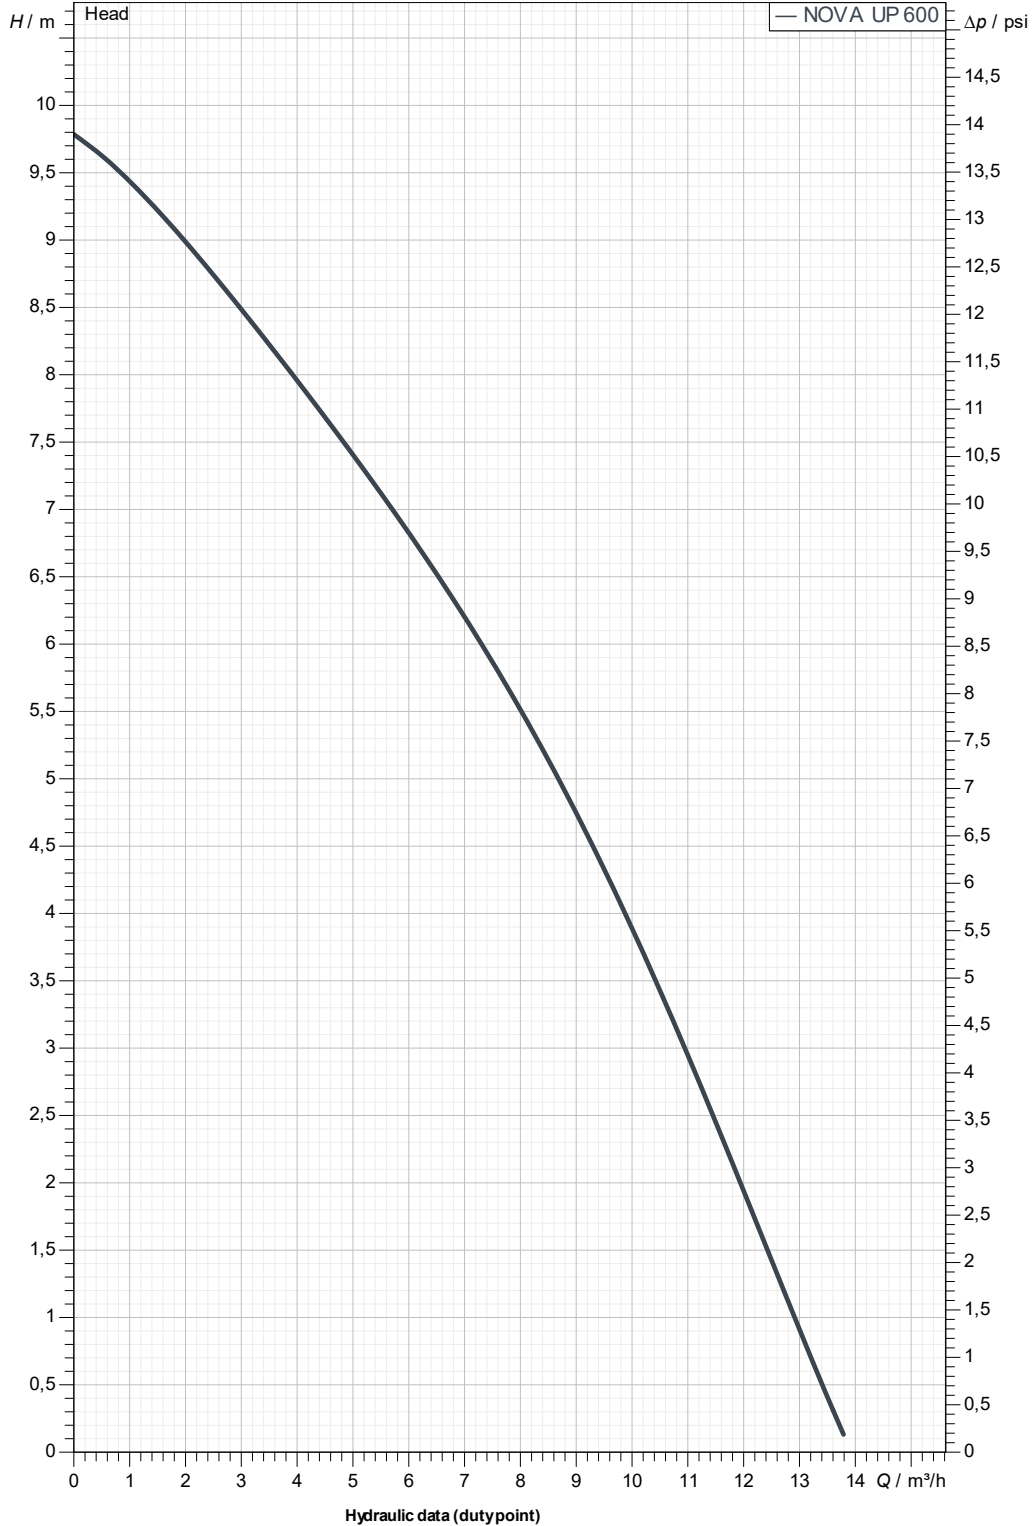

Suction side :

Discharge side :

Flow :

Head :

Rated speed :

1" 1/4 G

2.850 1/min

--

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2024-06-11

